SKU GB-160-15122X3QD-DR1

Job Name: Mark: Submitted By: Date: 11/23/2024

Centrifugal Downblast Exhaust Fan, Product # GB-160-15122X3QD-DR1, 1991-3751 CFM



Model GB, belt drive centrifugal roof exhaust fans are designed to meet the general clean air exhaust requirements for industrial and commercial buildings. Units feature a fully rolled windband bead for increased stability and easy transport. Fresh outside air is drawn in under the motor cover to maximize motor life.


- •22 x 22 inch base with prepunched mounting holes for easy attachment to roof curb
- Variable pitch adjustable motor pulley to optimize fan performance
- •18.5 x 18.5 inch recommended roof opening

B C C 13% inch

Certifications

Seismic AMCA Sound &Air High Wind and Hurricane UL/cUL 705

Performance Characteristics

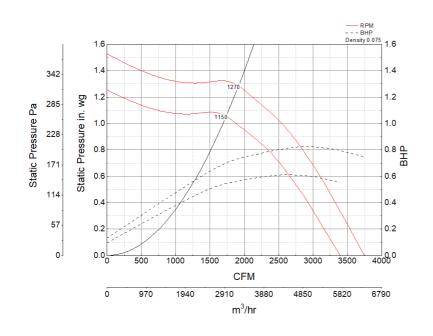

Construction Features

Drive Type	Belt Drive					
Impeller Type	Centrifugal Wheel					
Impeller Material	Aluminum					
Housing Material	Spun Aluminum					
Includes	Unassembled drive package					
Certifications	Seismic					
Certifications	AMCA Sound &Air					
Certifications	High Wind and Hurricane					
Certifications	UL/cUL 705					
B: B: B: ::	Motor and drives shipped					
Drive Package Description	loose					
Required Accessory	Roof curb for new installations					

Motor Information

Service Factor	1.15
Phase	3
Voltage	208-230/460
HP	1 1/2
Motor Enclosure	Open Drip Proof
Motor Insulation	F
NEMA Frame Size	56

Air and Sound Performance

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375	0.5	0.625	0.75	0.875	1	1.25
1 1/2 0.82	1270	270 1150	CFM	3,751	3,618	3,485	3,355	3,218	3,070	2,915	2,748	2,537	1,991	
			Sones	18.5	17.9	17.4	16.9	16.6	16.3	15.9	15.5	15.3	13.7	