

SKU G-060-DGE117XQD

Job Name: Mark: Submitted By: Date: 11/21/2024

Centrifugal Downblast Exhaust Fan, Model G-060, Direct Drive, 3-Speed, 115V, 1Ph, 73-203 CFM




Model G, direct drive centrifugal roof exhaust fans provide the industry's best performance and durability for general clean air applications where air is discharged downward, toward the roof. Units feature the most advanced motor cooling of any fan in its class.


- •17 x 17 inch base with prepunched mounting holes for easy attachment to roof curb
- •Speed controllable, with up to 30% turndown
- •13.5 x 13.5 inch recommended roof opening

Certifications

Seismic AMCA Sound &Air High Wind and Hurricane UL/cUL 705



Performance Characteristics

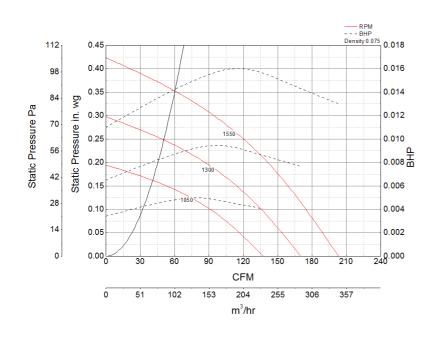

Construction Features

Drive Type	Direct Drive			
Impeller Type	Centrifugal Wheel			
Impeller Material	Composite			
Housing Material	erial Spun Aluminum			
Certifications	Seismic			
Certifications	AMCA Sound &Air			
Certifications	High Wind and Hurricane			
Certifications	UL/cUL 705			
Speed Controllable	Yes			
B : 14	Roof curbs for new			
Required Accessory	installations			

Motor Information

Service Factor	1
Phase	1
Voltage	115
HP	1/60
Motor Enclosure	n/a
Motor Insulation	В
Thermal Protection	AutoOverload

Air and Sound Performance

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25
0.0166 0.02 1550	1550	1550 1050	CFM	203	166	120	
	1050	Sones	13	3 8	3.7		



- •Greenheck Fan Corporation certifies that the model shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.
- •Performance certified is for installation type A: Free inlet, Free outlet.
- •Power rating (BHP/kW) does not include transmission losses.
- •Performance ratings include the effects of birdscreen.
- •The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.