

Ceiling Fan Model SPB-50 50 CFM 120-1




Low profile bathroom exhaust fan, Model SP-B features a forward-curved wheel for low sound and high efficiency. Units are ideal for residential, multi-family or hotel applications.


- Compact size for height restricted areas
- Round standard outlet for quick, easy connections
- Integral damper prevents unwanted backdrafts
- Speed controllable
- Designer grille included

Certifications

AMCA Air &Sound
UL/cUL 507

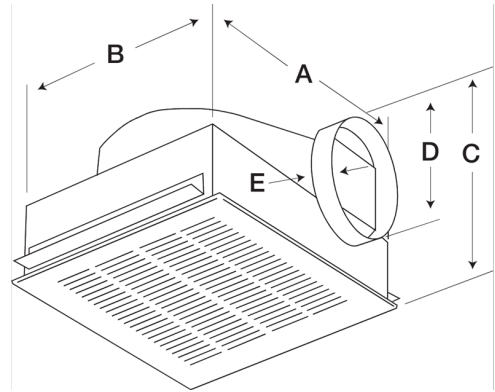

Performance Characteristics

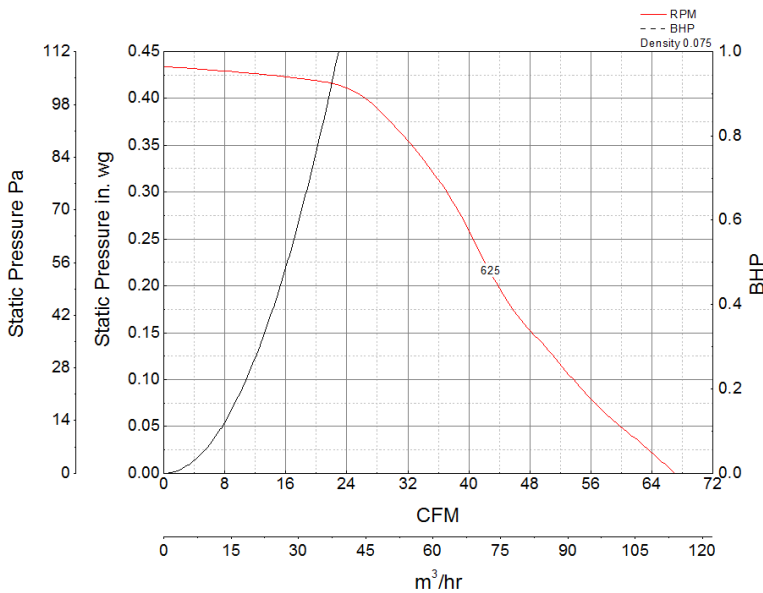

Construction Features

| | |
|--------------------|-------------------|
| Drive Type | Direct Drive |
| Impeller Type | Centrifugal Wheel |
| Impeller Material | Polypropylene |
| Housing Material | Galvanized Steel |
| Includes | Backdraft damper |
| Includes | Mounting brackets |
| Certifications | AMCA Air &Sound |
| Certifications | UL/cUL 507 |
| Speed Controllable | Yes |

Motor Information

| | |
|--------------------|--------------|
| Service Factor | 0 |
| Phase | 1 |
| Voltage | 115 |
| Motor Enclosure | n/a |
| Motor Insulation | B |
| Thermal Protection | AutoOverload |
| Watts | 15 |

Air and Sound Performance

| Watts | Max Fan RPM | Min Fan RPM | Ps (in. wg) | 0 | 0.125 | 0.25 | 0.375 |
|-------|-------------|-------------|-------------|-----|-------|------|-------|
| 37.8 | 625 | 500 | CFM | 67 | 51 | 40 | 29 |
| | | | Sones | 1.2 | 1.4 | 2 | 3 |