




Oscillating Air Circulator, Model ICO-24, 1/2HP, 115V, 1Ph, 4460-6400 CFM

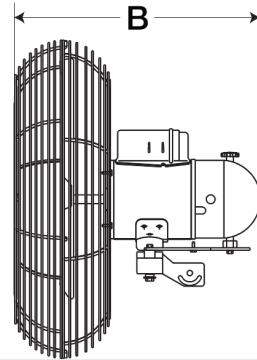

Model ICO, oscillating circulator fans are designed for air movement in humid and demanding applications. Units are ideal for spot cooling and recirculating air in factories, warehouses, manufacturing facilities and garages. Units sweep through 45° or 90° arc. Mounting accessory sold separately.

- Totally enclosed motor
- Preassembled
- OSHA-compliant zinc plated wire guard
- Circulator can sweep through 45° or 90° arc

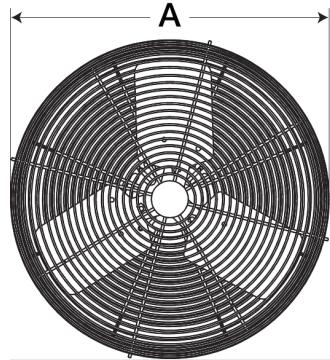

Certifications

UL/cUL 507

Performance Characteristics

No Fan Curve Available.

Construction Features

| | |
|--------------------|------------------------------|
| Drive Type | Direct Drive |
| Impeller Type | Propeller |
| Impeller Material | Aluminum |
| Includes | Mounting hardware |
| Includes | Power cord with 3-prong plug |
| Certifications | UL/cUL 507 |
| Required Accessory | Mounting accessory |

Motor Information

| | |
|------------------|---------------------------|
| Service Factor | 1 |
| Phase | 1 |
| Voltage | 115 |
| HP | 1/2 |
| Motor Enclosure | Totally Enclosed Air Over |
| Motor Insulation | B |
| NEMA Frame Size | 48YZ |

Air and Sound Performance

| Motor HP | Max BHP | Max Fan RPM | Min Fan RPM | Ps (in. wg) |
|----------|---------|-------------|-------------|--------------|
| 1/2 | 0.00 | 750 | 0 | CFM Sones |
| 1/2 | 0.00 | 1075 | 0 | CFM Sones |