

## SKU BSQ-240-15X-3-QD-DR1

Job Name: Mark: Submitted By: Date: 09/05/2025

# Centrifugal Inline Fan, Model BSQ-240, Belt Drive, 1 1/2HP, 208-230/460V, 3Ph, Motor & Drives Unassembled, 4386-6840 CFM




Model BSQ centrifugal inline fan features a unique combination of installation flexibility, rugged construction, ease of service, high efficiency and low sound levels. These compact fans are the ideal selection for indoor clean air applications including intake, exhaust, return or make-up air. •34.875 x 34.875 inch inlet width x height

- 34.875 x 34.875 men met width x height
- •34.875 x 34.875 inch outlet width x height
- Horizontal or vertical mounting


#### Certifications

AMCA Sound &Air UL/cUL 705

## **Performance Characteristics**

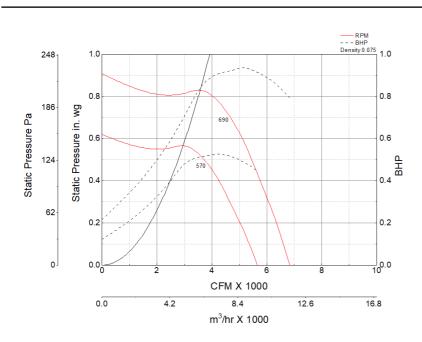

## Air and Sound Performance



## **Construction Features**

Belt Drive				
Centrifugal Wheel				
Aluminum				
Galvanized Steel				
Motor cover				
Unassembled drive package				
AMCA Sound & Air				
UL/cUL 705				
Motor and drives shipped loose				

#### Motor Information

Service Factor	1.15
Phase	3
Voltage	208-230/460
HP	1 1/2
Motor Enclosure	Open Drip Proof
Motor Insulation	F
NEMA Frame Size	56

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375	0.5	0.625	0.75
1 1/2	0.93	690	570	CFM	6,840	6,537	6,201	5,838	5,444	4,994	4,386
				Sones	15.6	15.4	15	14.5	14	13.3	12.6



•Greenheck Fan Corporation certifies that the model shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

- •Performance certified is for installation type B: Free inlet, Ducted outlet.
- •Power rating (BHP/kW) includes transmission losses.
- •Performance ratings do not include the effects of appurtenances (accessories).
- •The inlet sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type B: free inlet hemispherical sone levels.