

HVLS Fan, Model DS-3, Low Voltage 208/230/277v, 24 ft diameter, 3-blade, Fan Performance up to 176,900 CFM




DS-3 is a three-blade, direct drive overhead fan designed for commercial or industrial spaces with medium to high ceilings. These economical HVLS fans are the ideal balance between cost and performance, making them a smart choice for budget-conscious building owners. Plus, with a lighter weight than comparable overhead fans, the DS-3 is a breeze to install in any building.

- Plug-and-Play
- Safety Retention Cables &Guy Wires
- Impact &Over Speed Detection
- Electrical Safety Systems
- 10-year Warranty

Certifications

AMCA Circulating Fan Performance
CSA Certified
UL/cUL 507

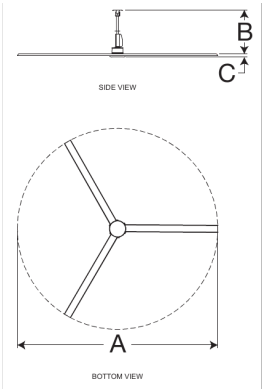

Performance Characteristics

No Fan Curve Available.

Construction Features

| | |
|--------------------|----------------------------------|
| Drive Type | Direct Drive |
| Impeller Type | Propeller/Axial |
| Impeller Material | Aluminum |
| Certifications | AMCA Circulating Fan Performance |
| Certifications | CSA Certified |
| Certifications | UL/cUL 507 |
| Speed Controllable | Yes |

Motor Information

| | |
|---------|---------|
| Phase | 1 |
| Phase | 3 |
| Voltage | 208-230 |
| Voltage | 277 |
| HP | 3/4 |