

SKU GB-200-7130XQD-DR1

Job Name: Mark: Submitted By: Date: 11/10/2025

Centrifugal Downblast Exhaust Fan, Product # GB-200-7130XQD-DR1, 2494-3874 CFM



Model GB, belt drive centrifugal roof exhaust fans are designed to meet the general clean air exhaust requirements for industrial and commercial buildings. Units feature a fully rolled windband bead for increased stability and easy transport. Fresh outside air is drawn in under the motor cover to maximize motor life.


- •30 x 30 inch base with prepunched mounting holes for easy attachment to roof curb
- Variable pitch adjustable motor pulley to optimize fan performance
- •26.5 x 26.5 inch recommended roof opening

B C C 134 inch

Certifications

AMCA Sound &Air High Wind and Hurricane Seismic UL/cUL 705

Performance Characteristics

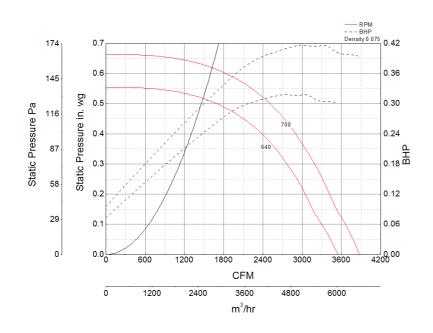

Construction Features

Drive Type	Belt Drive				
Impeller Type	Centrifugal Wheel				
Impeller Material	Aluminum				
Housing Material	Spun Aluminum				
Includes	Unassembled drive package				
Certifications	AMCA Sound &Air				
Certifications	High Wind and Hurricane				
Certifications	Seismic				
Certifications	UL/cUL 705				
5. 5. 5	Motor and drives shipped				
Drive Package Description	loose				
Required Accessory	Roof curb for new installations				

Motor Information

Service Factor	1.25
Phase	1
Voltage	115/208-230
HP	3/4
Motor Enclosure	Open Drip Proof
Motor Insulation	В
Thermal Protection	AutoOverload
NEMA Frame Size	56

Air and Sound Performance

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375	0.5
3/4 0.	0.41	41 700	640	CFM	3,874	3,591	3,308	2,974	2,494
	0.41	700		Sones	10.5	9.8	9.4	8.8	7.8



- •Greenheck Fan Corporation certifies that the model shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.
- •Performance certified is for installation type A: Free inlet, Free outlet.
- •Power rating (BHP/kW) includes transmission losses.
- •Performance ratings include the effects of birdscreen.
- •The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.