

Mobile Air Circulator, Model MAC-18, Direct Drive, 1/4 HP, 115V, 1Ph, 2400-3600 CFM





Model MAC, direct drive mobile air circulators are designed to move large volumes of air at low velocities, keeping individuals comfortable and productive. Ideal for manufacturing facilities and warehouses, these units feature galvanized steel construction and come with a variety of mounting options. Mounting accessory sold separately.

- Totally enclosed motor
- 2-speed, ball bearing motor
- OSHA-compliant wire guards

Certifications

UL/cUL 507

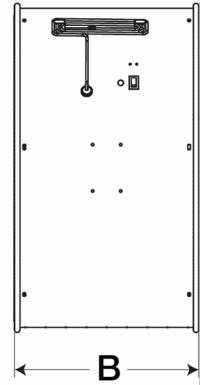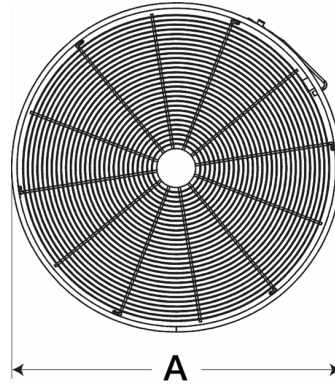

Performance Characteristics

No Fan Curve Available.

Construction Features

| | |
|--------------------|------------------------------|
| Drive Type | Direct Drive |
| Impeller Type | Propeller |
| Impeller Material | Galvanized Steel |
| Housing Material | Galvanized Steel |
| Includes | Power cord with 3-prong plug |
| Certifications | UL/cUL 507 |
| Required Accessory | Mounting accessory |

Motor Information

| | |
|--------------------|---------------------------|
| Service Factor | 1 |
| Phase | 1 |
| Voltage | 115 |
| HP | 1/4 |
| Motor Enclosure | Totally Enclosed Air Over |
| Motor Insulation | B |
| Thermal Protection | AutoOverload |

Air and Sound Performance

| Motor HP | Max BHP | Max Fan RPM | Min Fan RPM | Ps (in. wg) |
|----------|---------|-------------|-------------|-------------|
| 1/4 | 0.00 | 750 | 0 | CFM |
| | | | | Sones |
| 1/4 | 0.00 | 1075 | 0 | CFM |
| | | | | Sones |