


## Centrifugal Upblast Exhaust Fan, Product # CUBE-120-3119GQD-DR4, 1236-1936 CFM



The CUBE is an aluminum exhaust fan specifically designed for roof or sidewall mounted applications where contaminated or grease laden exhaust air can be discharged directly upward, away from the roof or wall surface. The fans feature a one piece windband continuously welded to curb cap and double studded isolators for true vibration isolation.


- 19 x 19 inch base with prepunched mounting holes for easy attachment to roof curb
- Roof or wall mountable
- 15.5 x 15.5 inch recommended roof opening

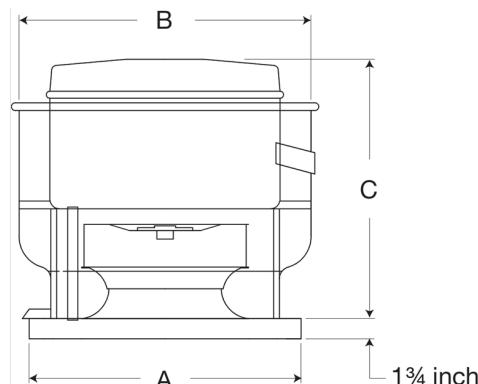

### Certifications

AMCA Sound & Air  
 UL/cUL 705 Listed - Supplement SC - "Power  
 Ventilators for Restaurant Exh. Appliances" (Formerly  
 UL 762)

### Performance Characteristics

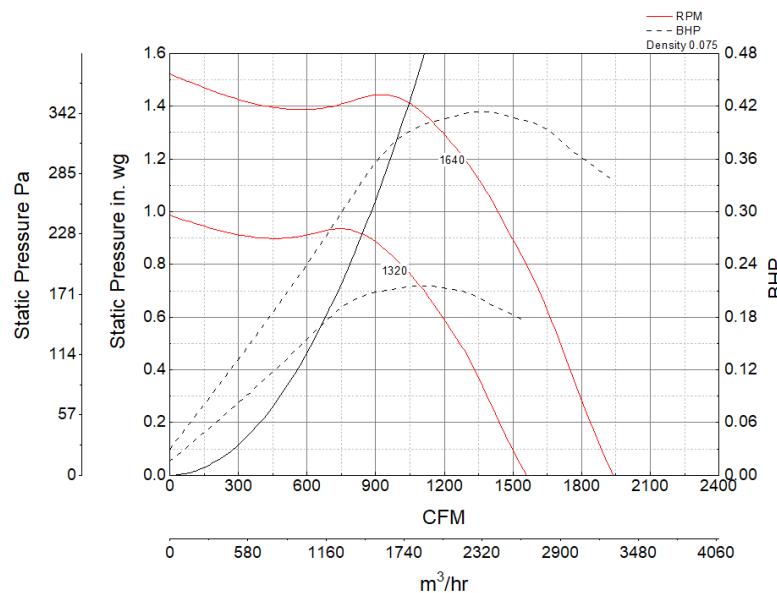

### Air and Sound Performance

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375	0.5	0.625	0.75	0.875	1	1.25
1/3	0.41	1640	1320	CFM	1,936	1,876	1,818	1,761	1,705	1,649	1,585	1,512	143	1,236
				Sones	14.2	14.8	15.3	16	16.3	16.5	16.7	16.8	16.8	16.6

### Construction Features

Drive Type	Belt Drive
Impeller Type	Centrifugal Wheel
Impeller Material	Aluminum
Housing Material	Spun Aluminum
Includes	Unassembled drive package
Certifications	AMCA Sound & Air UL/cUL 705 Listed - Supplement SC - "Power Ventilators for Restaurant Exh. Appliances" (Formerly UL 762)
Certifications	Motor and drives shipped loose
Drive Package Description	Roof curb for new roof installations
Required Accessory	

### Motor Information

Service Factor	1.35
Phase	1
Voltage	115/208-230
HP	1/3
Motor Enclosure	Open Drip Proof
Motor Insulation	B
Thermal Protection	AutoOverload
NEMA Frame Size	48