



**Mobile Air Circulator, Model MAC-36, Direct Drive, 1/2 HP, 115V, 1Ph, 9100-12500 CFM**



Model MAC, direct drive mobile air circulators are designed to move large volumes of air at low velocities, keeping individuals comfortable and productive. Ideal for manufacturing facilities and warehouses, these units feature galvanized steel construction and come with a variety of mounting options. Mounting accessory sold separately.

- Totally enclosed motor
- 2-speed, ball bearing motor
- OSHA-compliant wire guards

**Certifications**  
UL/cUL 507

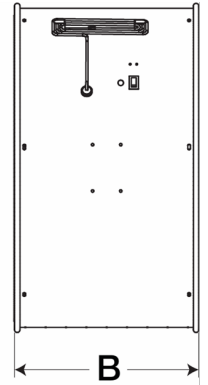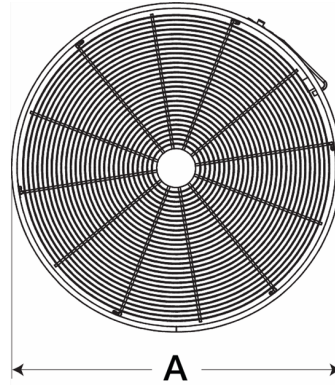

**Performance Characteristics**

No Fan Curve Available.

**Construction Features**

Drive Type	Direct Drive
Impeller Type	Propeller
Impeller Material	Galvanized Steel
Housing Material	Galvanized Steel
Includes	Power cord with 3-prong plug
Certifications	UL/cUL 507
Required Accessory	Mounting accessory

**Motor Information**

Service Factor	1
Phase	1
Voltage	115
HP	1/2
Motor Enclosure	Totally Enclosed Air Over
Motor Insulation	B
Thermal Protection	AutoOverload
NEMA Frame Size	48

**Air and Sound Performance**

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)
1/2	0.00	600	0	CFM
				Sones
1/2	0.00	825	0	CFM
				Sones