

## HVLS Fan, Model DS-3, Low Voltage 208/230/277v, 20 ft diameter, 3-blade, Fan Performance up to 144,500 CFM




DS-3 is a three-blade, direct drive overhead fan designed for commercial or industrial spaces with medium to high ceilings. These economical HVLS fans are the ideal balance between cost and performance, making them a smart choice for budget-conscious building owners. Plus, with a lighter weight than comparable overhead fans, the DS-3 is a breeze to install in any building.

- Plug-and-Play
- Safety Retention Cables & Guy Wires
- Impact & Over Speed Detection
- Electrical Safety Systems
- 10-year Warranty

### Certifications

AMCA Circulating Fan Performance  
CSA Certified  
UL/cUL 507

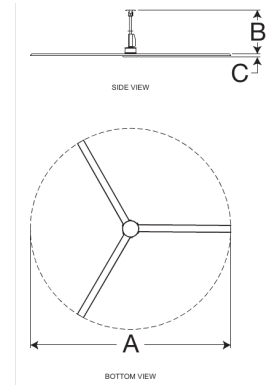

### Performance Characteristics

No Fan Curve Available.

### Construction Features

Drive Type	Direct Drive
Impeller Type	Propeller/Axial
Impeller Material	Aluminum
Certifications	AMCA Circulating Fan Performance
Certifications	CSA Certified
Certifications	UL/cUL 507
Speed Controllable	Yes

### Motor Information

Phase	1
Phase	3
Voltage	208-230
Voltage	277
HP	3/4