### SKU GB-130-5119X3QD-DR2

Job Name: Mark: Submitted By: Date: 11/10/2025

# Centrifugal Downblast Exhaust Fan, Product # GB-130-5119X3QD-DR2, 818-1263 CFM



Model GB, belt drive centrifugal roof exhaust fans are designed to meet the general clean air exhaust requirements for industrial and commercial buildings. Units feature a fully rolled windband bead for increased stability and easy transport. Fresh outside air is drawn in under the motor cover to maximize motor life.


- •19 x 19 inch base with prepunched mounting holes for easy attachment to roof curb
- Variable pitch adjustable motor pulley to optimize fan performance
- •15.5 x 15.5 inch recommended roof opening

# B C C 1¾ inch

### Certifications

AMCA Sound &Air High Wind and Hurricane Seismic UL/cUL 705

# **Performance Characteristics**

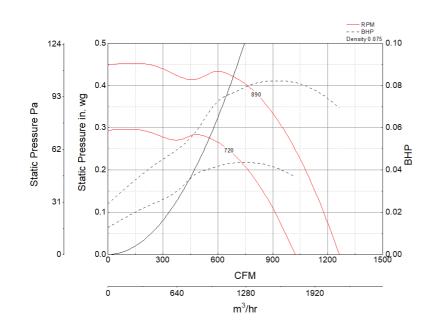

### **Construction Features**

Drive Type	Belt Drive			
Impeller Type	Centrifugal Wheel			
Impeller Material	Aluminum			
Housing Material	Spun Aluminum			
Includes	Unassembled drive package			
Certifications	AMCA Sound &Air			
Certifications	High Wind and Hurricane			
Certifications	Seismic			
Certifications	UL/cUL 705			
D' DI D''	Motor and drives shipped			
Drive Package Description	loose			
Required Accessory	Roof curb for new installations			

# **Motor Information**

Service Factor	1.25
Phase	3
Voltage	208-230/460
HP	1/2
Motor Enclosure	Open Drip Proof
Motor Insulation	F
NEMA Frame Size	56

# Air and Sound Performance

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375
1/2 0.08	890 720	700	CFM	1,263	1,153	1,020	818	
		Sones	6.9	6.7	6.5	6.2		