SKU CUBE-120-4119GQD-DR2

Job Name: Mark: Submitted By: Date: 11/04/2025

Centrifugal Upblast Exhaust Fan, Product # CUBE-120-4119GQD-DR2, 800-1134 CFM




The CUBE is an aluminum exhaust fan specifically designed for roof or sidewall mounted applications where contaminated or grease laden exhaust air can be discharged directly upward, away from the roof or wall surface. The fans feature a one piece windband continuously welded to curb cap and double studded isolators for true vibration isolation.


- •19 x 19 inch base with prepunched mounting holes for easy attachment to roof curb
- •Roof or wall mountable
- •15.5 x 15.5 inch recommended roof opening

Certifications

AMCA Sound & Air
UL/cUL 705 Listed - Supplement SC - "Power
Ventilators for Restaurant Exh. Appliances" (Formerly
UL 762)



Performance Characteristics

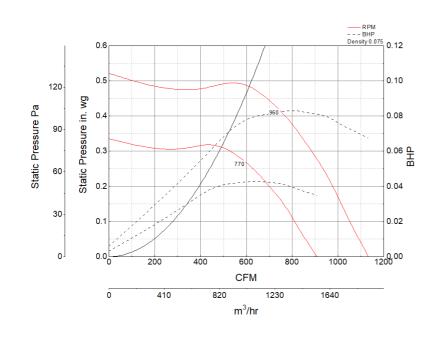

Construction Features

Drive Type	Belt Drive			
Impeller Type	Centrifugal Wheel			
Impeller Material	Aluminum			
Housing Material	Spun Aluminum			
Includes	Unassembled drive package			
Certifications	AMCA Sound &Air			
Certifications	UL/cUL 705 Listed -			
	Supplement SC - "Power			
	Ventilators for Restaurant Exh.			
	Appliances" (Formerly UL			
	762)			
D: D 1 D ::	Motor and drives shipped			
Drive Package Description	loose			
	Roof curb for new roof			
Required Accessory	installations			

Air and Sound Performance

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375
1/4 0.08	060	770	CFM	1,134	1,034	935	800	
	0.08	960	770	Sones	5.9	6.4	6.4	6.3