

## Bathroom Exhaust Fan, Low Profile, Model SP-B110, 115V, 1Ph, 50-133 CFM




Low profile bathroom exhaust fan, Model SP-B features a forward-curved wheel for low sound and high efficiency. Units are ideal for residential, multi-family or hotel applications.


- Motion and humidity sensing grille options available
- Compact size for height restricted areas
- Integral damper prevents unwanted backdrafts
- Round standard outlet for quick, easy connections
- Speed controllable
- Designer grille included

### Certifications

AMCA Air &Sound  
UL/cUL 507

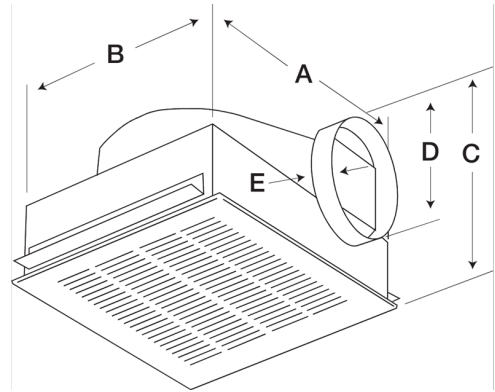

### Performance Characteristics

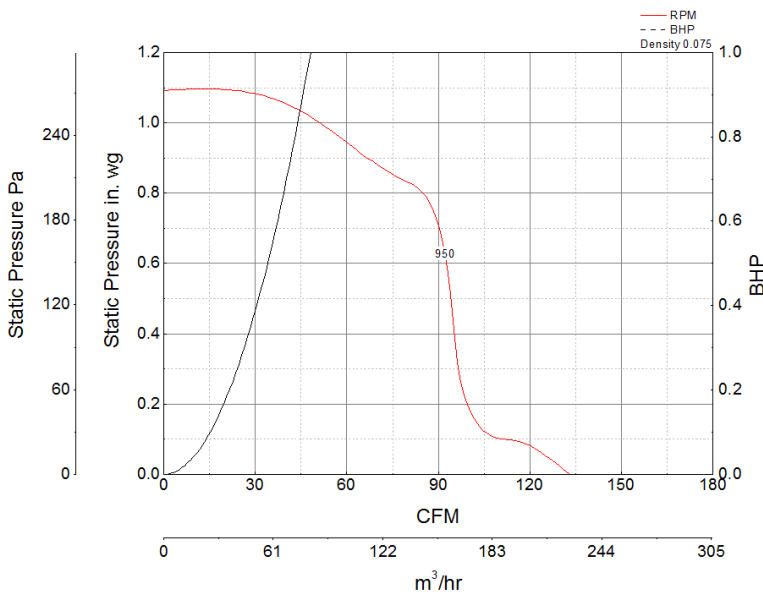

### Construction Features

|                    |                   |
|--------------------|-------------------|
| Drive Type         | Direct Drive      |
| Impeller Type      | Centrifugal Wheel |
| Impeller Material  | Polypropylene     |
| Housing Material   | Galvanized Steel  |
| Includes           | Backdraft damper  |
| Includes           | Mounting brackets |
| Certifications     | AMCA Air &Sound   |
| Certifications     | UL/cUL 507        |
| Speed Controllable | Yes               |

### Motor Information

|                    |              |
|--------------------|--------------|
| Service Factor     | 1            |
| Phase              | 1            |
| Voltage            | 115          |
| Motor Enclosure    | n/a          |
| Motor Insulation   | B            |
| Thermal Protection | AutoOverload |
| Watts              | 8            |

### Air and Sound Performance

| Watts | Max Fan RPM | Min Fan RPM | Ps (in. wg) | 0   | 0.125 | 0.25 | 0.375 | 0.5 | 0.625 | 0.75 | 0.875 | 1   |
|-------|-------------|-------------|-------------|-----|-------|------|-------|-----|-------|------|-------|-----|
|       |             |             |             | CFM | 133   | 110  | 97    | 95  | 94    | 91   | 85    | 72  |
| 80.2  | 950         | 760         | Sones       | 1.5 | 1.5   | 2    | 2     | 2   | 3     | 3.5  | 4     | 4.5 |