Job Name: Mark: Submitted By: Date: 11/10/2025

Centrifugal Inline Fan, Model BSQ-240, Belt Drive, 5HP, 208-230/460V, 3Ph, Motor & Drives Unassembled, 7293-12193 CFM




Model BSQ centrifugal inline fan features a unique combination of installation flexibility, rugged construction, ease of service, high efficiency and low sound levels. These compact fans are the ideal selection for indoor clean air applications including intake, exhaust, return or make-up air.


- •34.875 x 34.875 inch inlet width x height
- •34.875 x 34.875 inch outlet width x height
- •Horizontal or vertical mounting

Certifications

AMCA Sound &Air UL/cUL 705

Performance Characteristics

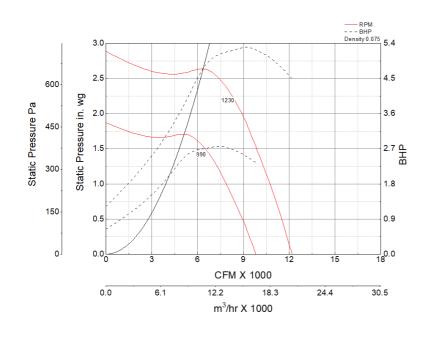



Construction Features

Drive Type	Belt Drive						
Impeller Type	Centrifugal Wheel						
Impeller Material	Aluminum						
Housing Material	Galvanized Steel						
Includes	Motor cover						
Includes	Unassembled drive package						
Certifications	AMCA Sound &Air						
Certifications	UL/cUL 705						
Drive Package Description	Motor and drives shipped loose						

Motor Information

Service Factor	1.15
Phase	3
Voltage	208-230/460
HP	5
Motor Enclosure	Open Drip Proof
Motor Insulation	F
NEMA Frame Size	184T

Air and Sound Performance

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375	0.5	0.625	0.75	0.875	1	1.25	1.5	1.75	2	2.25	2.5
5	5.28	1230	990	CFM	12,193	12,023	11,853	11,683	11,512	11,324	11,125	10,926	10,727	10,305	9,866	9,409	8,870	8,241	7,293
				Sones	42	41	40	39	38	38	38	36	34	31	29	28	28	27	26



- •Greenheck Fan Corporation certifies that the model shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.
- •Performance certified is for installation type B: Free inlet, Ducted outlet.
- •Power rating (BHP/kW) includes transmission losses.
- •Performance ratings do not include the effects of appurtenances (accessories).
- •The inlet sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type B: free inlet hemispherical sone levels.