Job Name: Mark: Submitted By: Date: 09/05/2025

Centrifugal Supply Fan, Model SAF-112, Belt Drive, 1HP, 208-230/460V, 3Ph, Motor & Drives Unassembled, 1802-4060 CFM




Model SAF is a filtered supply fan designed to provide non-tempered make-up air to commercial or industrial buildings, including commercial kitchen applications. Fresh outdoor air is supplied to replace air lost through hood exhaust or general building ventilation.


- •34.5 x 34.5 inch base with prepunched mounting holes for easy attachment to roof curb
- Permanent washable aluminum filters allow for many years of reliable use
- •26.5 x 26.5 inch recommended roof opening

Certifications

AMCA Sound &Air UL/cUL 705

Performance Characteristics

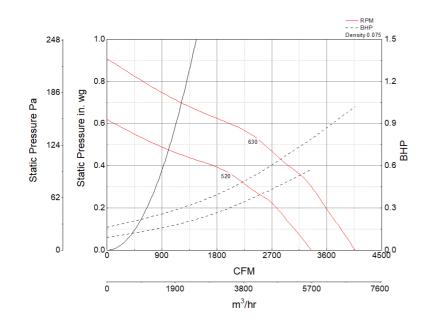

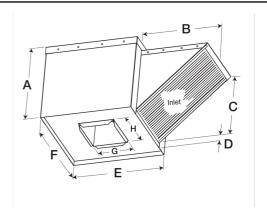

Construction Features

Drive Type	Belt Drive			
Impeller Type	Forward Curved Wheel			
Impeller Material	Aluminum			
Housing Material	Galvanized Steel			
Includes	Access Panels			
Includes	Unassembled drive package			
	Washable, aluminum 1-inch			
Includes	filters			
Certifications	AMCA Sound &Air			
Certifications	UL/cUL 705			
D: D	Motor and drives shipped			
Drive Package Description	loose			
D ' 14	Roof curb for new roof			
Required Accessory	installations			

Motor Information

Service Factor	1.15
Phase	3
Voltage	208-230/460
HP	1
Motor Enclosure	Open Drip Proof
Motor Insulation	F
Thermal Protection	Thermostat
NEMA Frame Size	143T

Air and Sound Performance

Motor HP	Max BHP	Max Fan RPM	Min Fan RPM	Ps (in. wg)	0	0.125	0.25	0.375	0.5	0.625
1 1.0	1.02	1.02 630 520	520	CFM	4,060	3,772	3,466	3,075	2,569	1,802
	1.02		Sones	20	19.2	16.9	15.2	13.3	12.2	